


Winch type SR 30 E3

Products

The standard build SR type winch is the basis of the solution to many pulling and lifting winch applications. The winch is constructed with a slew ring in a combination with 3 or more planetary drives and motors. Capacities can go up to 75 tons of lifting capacity with this range. Although the name of this winch indicates different, these winches are very suitable to suit your specific winch application. Several options can be offered on these highly versatile winches. Prices and drawings will be supplied upon request.

Manufacturer code	SR 30 E3
Medium	Electric
Environment	Oil and Gas
Application	Traversing
Series	SR
Working Load Limit (WLL) [kg]	43000 kg
Number of layers	5
Lifting WLL first layer	43000 kg
Lifting WLL top layer	30000 kg
Speed at first layer	7 m/min
Speed top layer	10 m/min
Drum capacity first layer	42 m
Drum capacity top layer	290 m
Rope diameter	44 mm
Motor power S2 duty	66 kW
Motor voltage	400V-AC-3-phase

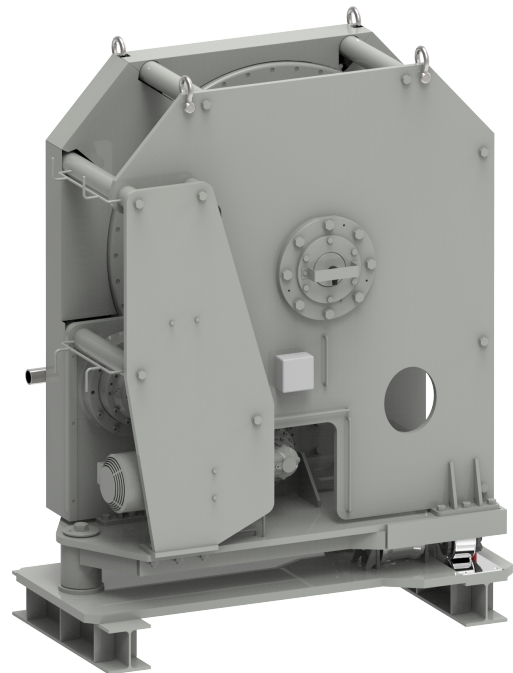

Drawing on request

sales@emce.com